


END CAP



An ISO 9001:2015 Company

Parth brand owned by
Parth Poly Fusion Pvt. Ltd.

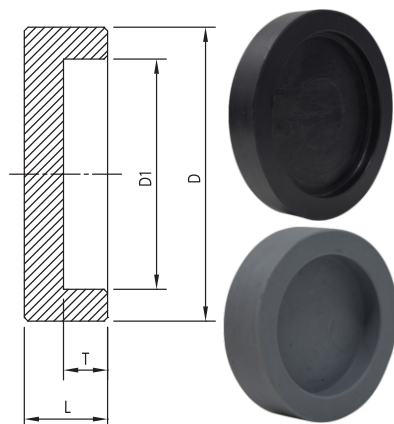

- Fitting Technology: Butt-Fusion Fitting
- MOC - PP (Polypropylene) / PPCP - NATURAL (Polypropylene - Copolymer) / ISO-PP (Isotactic Polypropylene) / HDPE (High-Density Polyethylene) / PP-H (Polypropylene - Homopolymer) and PVDF (Polyvinylidene Fluoride)
- As Per IS: 8008 - 1976 (PART IX)
- Max. Working Pressure and Temp.: 10kg / cm² / 150 PSI and 80° C
- Available Size: ½" (20 MM) to 12" (315 MM)

Note: Fitting may have our old "PARTH" Logo

SIZE		CODE	ØD	D1	L	T
IN.	MM					
½ "	20	P1EC01	20.0	12.0	12.0	8.0
¾ "	25	P1EC02	25.0	18.0	15.0	8.0
1 "	32	P1EC03	32.0	24.5	13.0	8.0
1 ¼ "	40	P1EC04	40.0	30.0	16.0	8.0
1 ½ "	50	P1EC05	50.0	38.0	16.5	9.0
2 "	63	P1EC06	63.0	47.0	17.0	9.5
2 ½ "	75	P1EC07	75.0	57.0	18.0	10.0
3 "	90	P1EC08	90.0	70.0	18.0	10.0
4 "	110	P1EC09	110.0	90.0	19.0	10.0
5 "	125	P1EC10	125.0	98.0	22.5	12.0
5 ¼ "	140	P1EC11	140.0	111.0	24.0	12.0
6 "	160	P1EC12	160.0	130.0	27.5	15.0
7 "	180	P1EC13	180.0	150.0	28.5	16.0
8 "	200	P1EC14	200.0	165.0	28.5	17.0
9 "	225	P1EC15	225.0	191.0	28.5	19.0
10 "	250	P1EC16	250.0	211.0	34.0	23.0
11 "	280	P1EC17	280.0	235.5	36.0	23.0
12 "	315	P1EC18	315.0	261.5	36.0	23.0

All Dimensions Are In mm

As Per Is : 8008-1976 (part IX)

Max. Working Pressure 10kg/cm²

(±2 MM)

WORKING PRESSURE

BODY	TEMP.
150 PSI	80° C



PARTH POLY FUSION PVT. LTD.

New Survey No. : 1065/1, Opp. Viva - 2 Ind. Estate,
Near Bhavda Gaam Canal, Bhavda, Ta: Daskroi,
Dist : Ahmedabad, GJ, IN. Pin Code : 382433

AEROCHEM PIPING PVT. LTD.

Plot No. 258, Road No. 1/B,
Phase - I, Kathwada GIDC,
Ahmedabad, GJ, IN. Pin Code : 382430

CONTACT :

+91-9375112220
sales@parthvalves.com
www.parthfusion.com

Note: Every effort has been made to ensure the information in this brochure is correct at the date of issue. Parth Poly Fusion Pvt. Ltd. operates a policy of continual product improvement and range extension, hence reserves the right to modify product specifications, without prior information, in line with market requirements.